


FRONT BODY PILLAR LOWER GUSSET (ASSY)

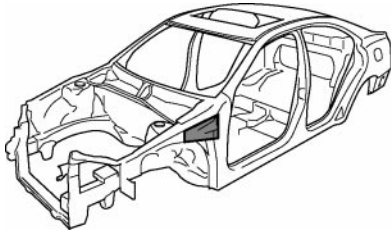

F25885A

Symbol meaning

REMOVAL


△ : Remove Weld Points

INSTALLATION

◻ : MIG Plug Weld

F25885B

REMOVAL·INSTALLATION

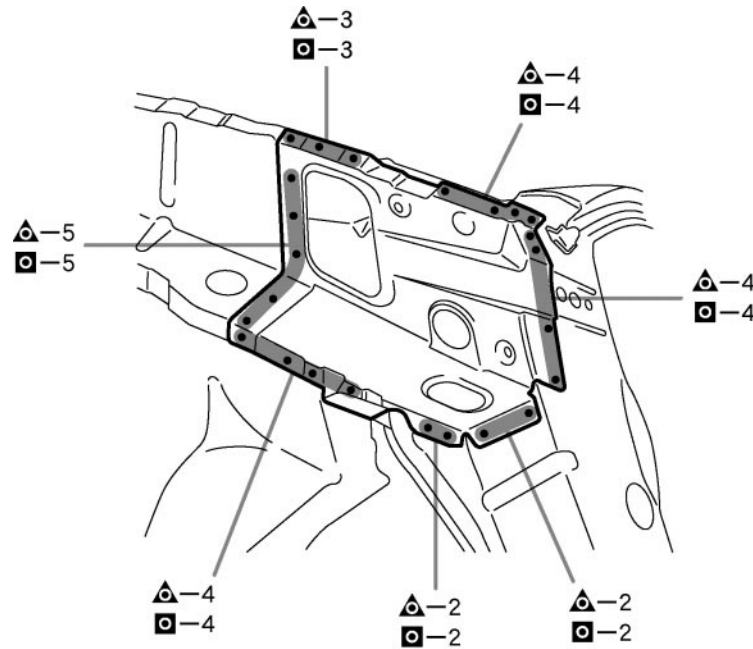

F25885

INSTALLATION POINT

- 1 After welding, apply body sealer to the corresponding parts. (See the paint-coating)
- 2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.